ISM560

PCI Fax Modem 56K

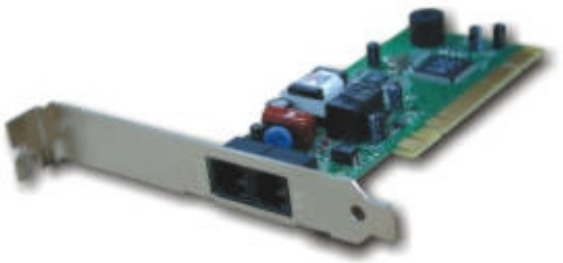

General Features:
* PCI 2.2 Compliant Plug & Play interface
* Windows 2000, Windows 98, Windows 95/OSR2, Windows NT 4.0 and Windows ME, Windows XP
* Hayes Compatible AT Commands
* Auto Speed/Mode Selection
* CE approval, CTR21 Pan-European approval

Data Mode:
* V.92/V.90/K56flex (UP to 56Kbps down stream)
* V.34 (33600 to 24000bps)
* V.32bis (14400bps), V.22 (2400bps)
* V.32 (9600bps), V.22 (1200bps)
* Bell 212A (1200bps), Bell 103 (300bps)
* V.44 bis (data compression)
* V.42bis (data compression), MNP 5 (data compression)
* V.42 (error correction), MNP 2-4 (error correction)

Fax Mode:
* V.17 (14400bps FAX), V.29 (9600bps FAX), V.27ter (4800bps FAX)
* V.21 Chennel-2 (300bps FAX)
* Class 1 Fax Command set
* T.31 class 1 FAX